




High Power LED T8 tube (4th generation)

Model	Length	Power	Fixture Lumens	CT	Life Time
NDT-T806/60-SMD	600mm	6W	frosted cover: 600lm; transparent cover:650lm	6000K	50,000hr
NDT-T810/60-SMD	600mm	10W	frosted cover: 800lm; transparent cover:900lm	6000K	50,000hr
NDT-T812/120-SMD	1200mm	12W	frosted cover: 1200lm; transparent cover:1300lm	6000K	50,000hr
NDT-T818/120-SMD	1200mm	18W	frosted cover: 1500lm; transparent cover:1600lm	6000K	50,000hr

PRODUCT SPECIFICATION AND MAIN FEATURES



RoHS




NDT-T818/120-SMD
12W LED tube
= 40w fluorescent tube

- 90-100 lm/w cool white
- 50,000 hours life time
- Low casing temperature only 50°C
- Less than 1% lumionous decay each year

50,000 Hours

100-240 V

50/60 Hz

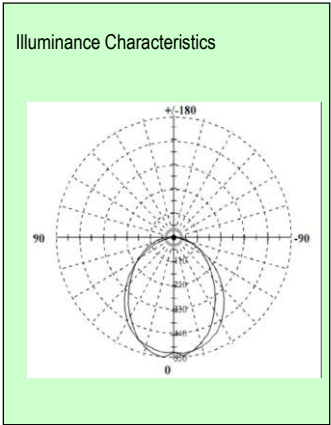

Applications: Shopping mall, plant, tunnel, school, office lighting



The NDT-series LED daylight tube has a molded aluminus alloy shell acting as a perfect heat sink for LEDs so as to extend the lifetime over 50,000hrs, which is 50 times longer than the conventional tungsten wire incandescent lamps.

Remove the starters before installation

